

# STEELCOAT™ SOIL AIR INTERFACE SYSTEM



A combined tape and liquid coating system for corrosion prevention on the highly susceptible area where underground pipes, operating at elevated temperatures, emerge above ground

The Steelcoat™ Soil Air Interface System is used to protect the section of pipe that rises from below to above ground in elevated temperatures. A section of at least 500 mm above and 500 mm below ground should be protected. The system comprises Denso Hotline™ Tape and Denso Glass Outerwrap™, both wrapped with a 55% overlap (cured underneath a layer of Denso Clear Outerwrap™ that is removed post-curing) and finished with a coating of Archco 65™ Topcoat.

## FEATURES

- Tough Denso protection
- Protects the vulnerable area above and below ground from corrosion

## COMPONENTS

Denso Hotline™ Tape

Denso Glass Outerwrap™


Denso Clear Outerwrap™

Applied to allow Denso Glass Outerwrap to cure and removed once curing is complete.

Archco 65™ Topcoat

## SURFACE PREPARATION

Minimal surface preparation required. Surfaces must be clean and dry. Remove all loose rust, scale and flaking coatings by hand wire brush.

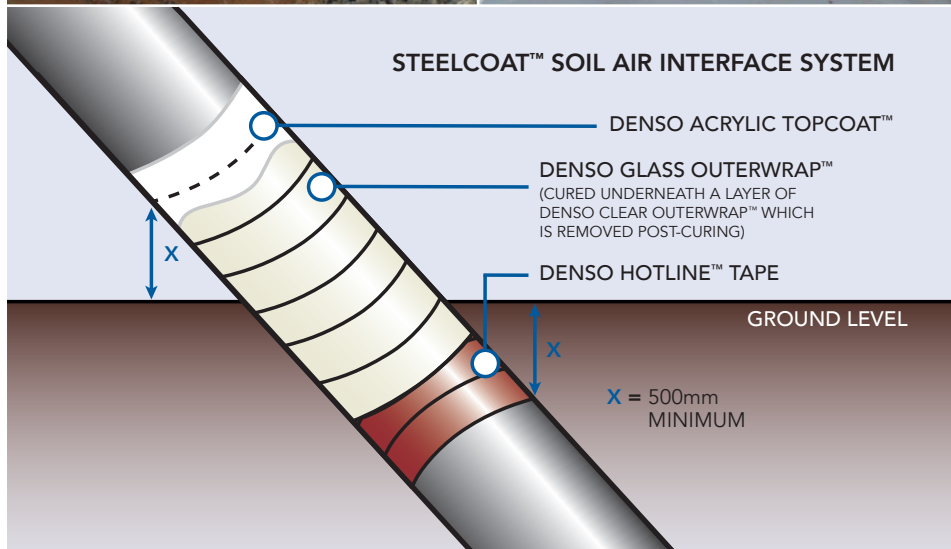

PUB No. 501.05.2020



FM 01548 | EMS 583748  
ISO 9001:2015 & ISO 14001:2015

## WINN & COALES (DENSO) LTD

TEL: +44 (0) 208 670 7511  
FAX: +44 (0) 208 761 2456  
EMAIL: mail@denso.net  
WEB: www.denso.net

Winn & Coales (Denso) Ltd  
33 - 35 Chapel Road  
London SE27 0TR  
UNITED KINGDOM

